




REGANS

Victorian Ash

Plantation grown in Chile
(Eucalyptus Regnans)

Eucalyptus Regnans is the tallest hardwood tree on earth, remarkable for its rate of growth, tree form and unique lumber quality.

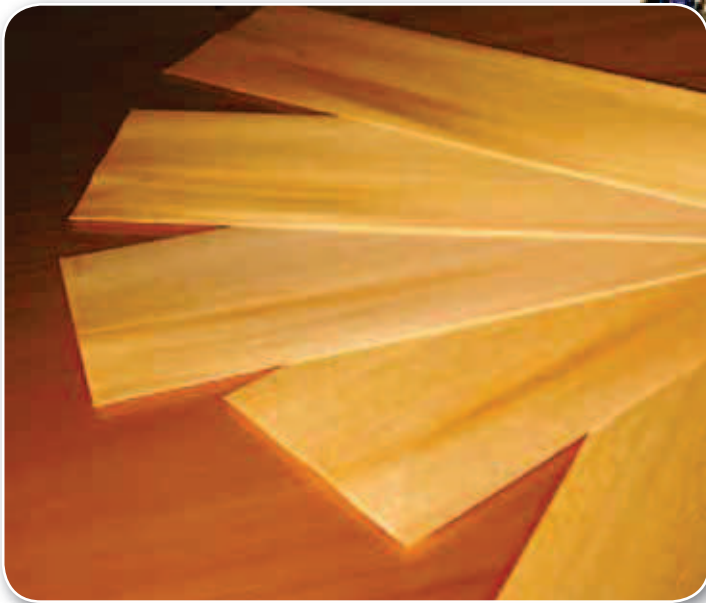

Eucalyptus regnans was introduced in Chile during the nineteen sixties by the Forestry Institute (INFOR) along with other species of eucalyptus.

Its outstanding growth and tree form plus references from Australia about its excellent timber quality led a Chile family

owned forestry company, called Regnans Ltd to start planting the specie early 1984. Today, there are over 1,000 ha of plantation Chilean Ash ages from 1 to 24 years; ongoing planting of saplings ensures long term future supply of plantation Chilean Ash.



Sliced Veneer logs (pruned 45 cm SED and above)



Sliced Veneer



Juvenile logs (20-40 cm sed)



KD Lumber: Grades Select, Standard, Feature and Merch. R/S, S2S, S4S



Industrial final harvest logs (non pruned 40 cm and above)



Mouldings: Solid and finger Jointed




CHILEAN ASH GRADES


Regnans SELECT



Eucalyptus Regnans SELECT



Sound Knots / Burls

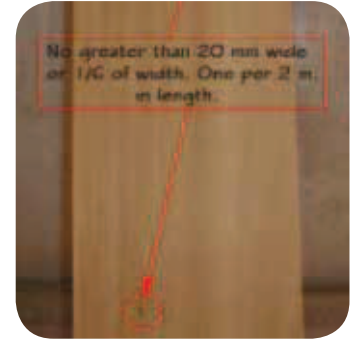

Sound Knots / Burls




Seen From One Side

Product Sheet SELECT Grade

DEFECT	SELECT 2 Face/ 2 Edges
Internal Checking	No Allowed
Surface Checks	No Allowed
Sound Knots / Burls	No greater than 20mm. wide or 1/6 of width. One per 2m. in length
Tight Gum Vein	No greater than 2mm. wide
Loose Gum Vein	No permitted
Brown Stain	Slight
Hobnail	No Limitation
Gum Pockets	No permitted
Black Speck	Slight
Pinholes and Holes	No permitted
Rot / Decay	No permitted
Heart Wood	No permitted
End Split	Not exceeding 12mm. in length




Regnans STANDARD

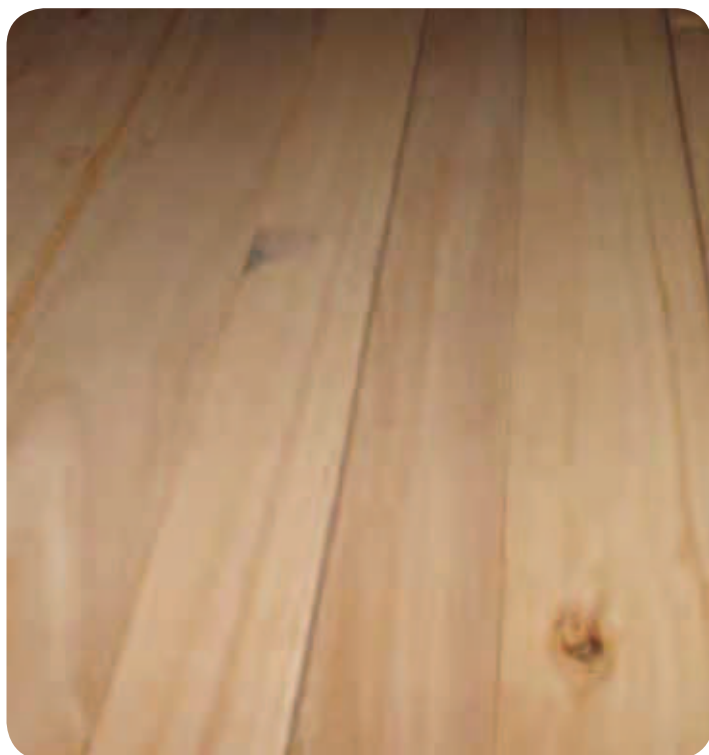

Eucalyptus Regnans STANDARD



Gum Vein



Surface Check



Seperficial Knot on Backface


Product Sheet STANDARD Grade

DEFECT	STANDARD 1 Face/ 2 Edges
Internal Checking	Not Allowed
Surface Checks	Not to exceed 2mm. in depth.
Sound Knots / Burls	No greater than 60mm. wide or 1/4 of with. One in any 1m. length.
Tight Gum Vein	Not greater than 5mm. Wide.
Loose Gum Vein	Not greater than 6mm. wide, not intersecting an end.
Brown Stain	No Limitation
Hobnail	No Limitation
Gum Pockets	Not greater than 6mm. wide. Length max 25 mm. Not exceeding 2 per 1500 mm. of length
Black Speck	No Limitation
Pinholes and Holes	Not greater than 3 mm. in diameter 6 per 100x100 area and not associated with rot.
Rot / Decay	Not Permitted
Heart Wood	Not Permitted
End Split	Not exceeding 12 mm. in length




CHILEAN ASH GRADES... Cont.

Regnans FEATURE

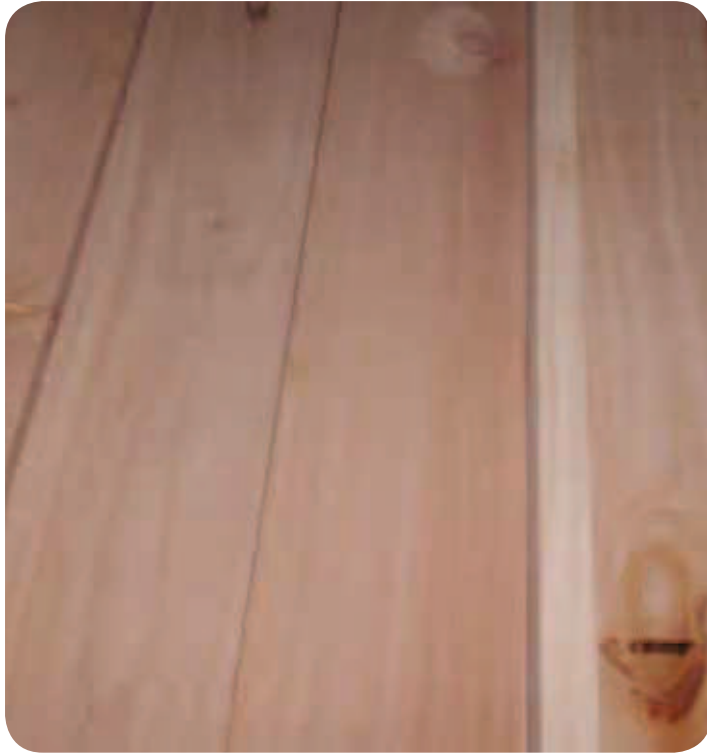

Eucalyptus Regnans FEATURE



Sound Knots / Burls



Hole



View 2 Eucalyptus Regnans FEATURE

Product Sheet FEATURE Grade


DEFECT	FEATURE 1 Face/ 2 Edges
Internal Checking	Not Allowed
Surface Checks	Not to exceed 2mm. in depth.
Sound Knots / Burls	No Limitation
Tight Gum Vein	No limitation as long as it doesn't affect strength of board
Loose Gum Vein	Not greater than 3mm. wide, not intersecting an end.
Brown Stain	No Limitation
Hobnail	No Limitation
Gum Pockets	Not limitation providing it does not affect the strength of the board.
Black Speck	No Limitation
Pinholes and Holes	Not limitation providing it does not affect the strength of the board
Rot / Decay	Not Permitted
Heart Wood	Not Permitted
End Split	Not exceeding 12 mm. in length




Regnans MERCH




Eucalyptus Regnans MERCH



Surface Check



Hole



Surface Check



End Split

Product Sheet MERCH Grade

DEFECT	MERCH Worst Face
Internal Checking	No Limitation
Surface Checks	No Limitation
Sound Knots / Burls	No Limitation
Tight Gum Vein	No Limitation
Loose Gum Vein	Not greater than 5mm. Wide.
Brown Stain	No Limitation
Hobnail	No Limitation
Gum Pockets	No Limitation
Black Speck	No Limitation
Pinholes and Holes	Seattered
Rot / Decay	Not Permitted
Heart Wood	Not Permitted
End Split	Up to 150 mm. in lenght.